



THE TECRETE SYSTEM

An industry leader for over 30 years the TecCrete system is the original concrete surface panel. It has become the leading choice for architects and developers who demand best in class performance and value for their critical building systems. TecCrete is available in both corner-lock and gravity-held configurations.

UNDERSTRUCTURE

Bolted stringer and corner-lock systems

PANEL DIMENSIONS

Imperial - 24" x 24"

THICKNESS

Nominal 1.125" or 1.5"


FEATURES

- Steel pan and concrete composite construction delivers industry leading static and dynamic loading performance
- Solid feel underfoot and high level of acoustical performance
- Height Adjustable from 3"-54"
- Pedestal lock and positioning system for easier installation
- Flat bottom and uniform thickness maximizes underfloor clearance
- 58% recycled content (LEED MR 4.1 & 4.2)
- Greenguard Gold Certification
- Industry Leading 3 Year Standard Structural Warranty



TECCRETE

ACCESSORY CUT-OUTS

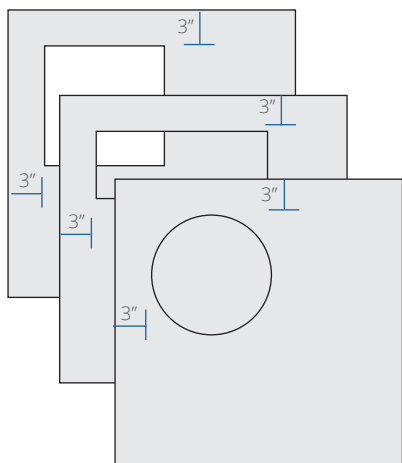

Material Properties

Concentrated Load (min)


Uniform Load (min)

*Rolling Load
(10/10,000 Pass)*

PERFORMANCE DATA TC PANEL BARE

	TC 1250	TC 1500	TC 1500SL	TC 2000	TC 2500
Concentrated Load (min)	1250 lbs (567 kg)	1500 lbs (680 kg)	1500 lbs (680 kg)	2000 lbs (907 kg)	2500 lbs (1134 kg)
Uniform Load (min)	600 lbs (272 kg)	700 lbs (318 kg)	700 lbs (318 kg)	800 lbs (363 kg)	900 lbs (408 kg)
Rolling Load (10/10,000 Pass)	1300 lbs / 900 lbs (590 kg / 408 kg)	1500 lbs / 1250 lbs (680 kg / 567 kg)	1500 lbs / 1250 lbs (680 kg / 567 kg)	1750 lbs / 2000 lbs (794 kg / 907 kg)	2000 lbs / 2000 lbs (907 kg / 907 kg)

CORNER-LOCK SYSTEM

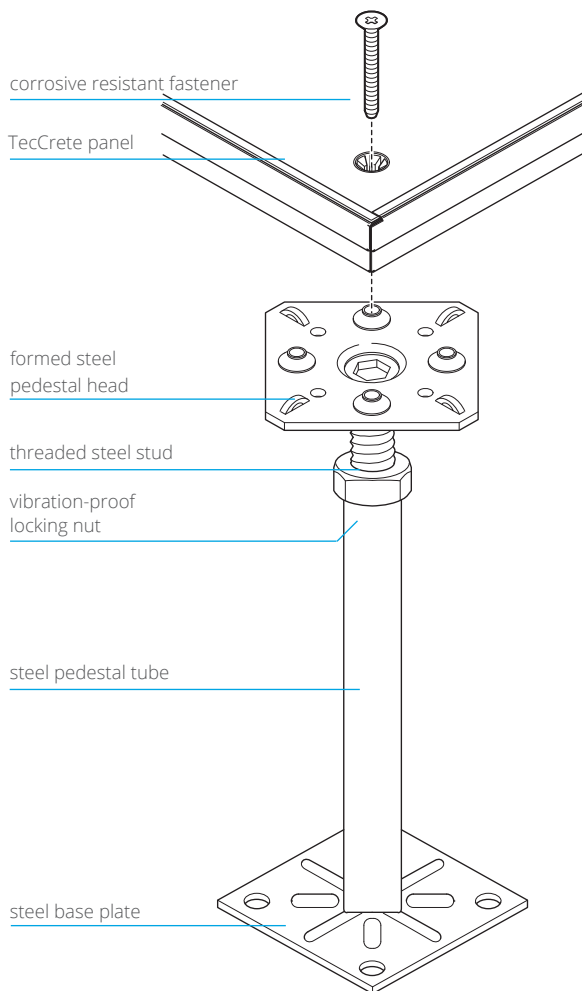

BOLTED STRINGER SYSTEM

